

Data Sheet



The WireFree GenII View OI-9100 Signal Strength Meter

DESCRIPTION

The WireFree GenII View OI-9100 is a hand held signal strength meter specifically engineered to show the status of any WireFree GenII gas detection device within range.

The View features a 4-line scrollable display. Using a 4-column read, the View is capable of revealing the Channel, Reading, Signal Strength, and Time Since Last Message of any WireFree device on site, as well as the Sensor, Gas, and Battery. The View contains a 2.4 GHz ISM, 100 mW, 2.5 miles Line-of-Site (LOS) radio, ensuring prompt and accurate communication with other WireFree devices.

The ability of the View to continuously notify the user of each WireFree device's status at a particular site make the device a truly phenomenal safety product to be introduced into the industry.

PRODUCT PHOTO



SPECIFICATIONS

Operating Power:	Two 3.7V Lithium Ion batteries; rechargeable
Battery Life:	16 hours (continuous use); time will vary with battery life
Radio Options:	2.4 GHz ISM, 100 mW, 2.5 miles LOS
Enclosure:	Black aluminum; powder coated
Enclosure Dimensions:	4.875" x 4" x 1.188"
Display:	4 x 20 character alpha/numeric LCD
Fuses:	PTC (automatic resettable) Non end-user replaceable
Warranty:	Hardware: One-year (Limited)

Otis Instruments, Inc.
2200 E. Villa Maria Dr
Bryan, TX 77802

979.776.7700

Fax: 979.776.7719


info@otisinstruments.com
www.otisinstruments.com

Data Sheet

The WireFree GenII View OI-9100 Signal Strength Meter



DIMENSIONS

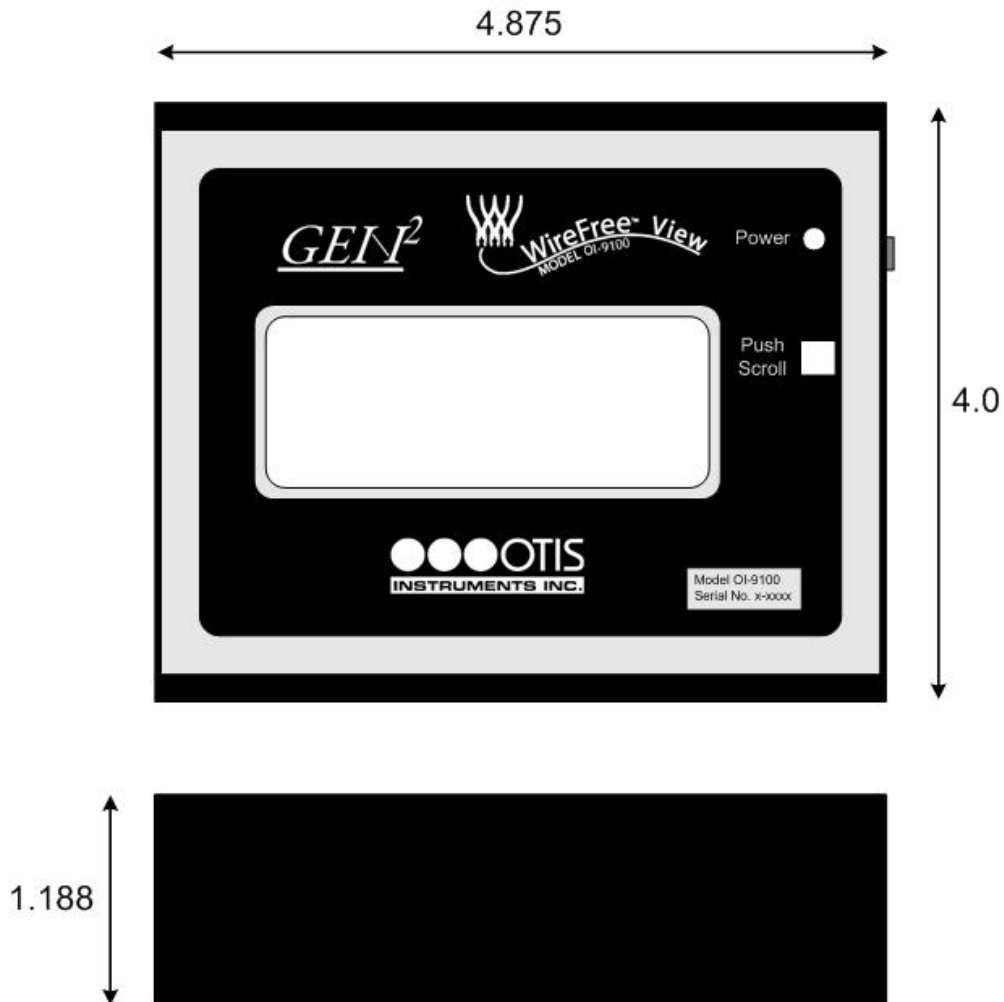

Revision 1.1

Otis Instruments, Inc.
2200 E. Villa Maria Dr
Bryan, TX 77802
979.776.7700
Fax: 979.776.7719
info@otisinstruments.com
www.otisinstruments.com